


2.1 Ceiling entrance specification


Cut out an installation hole of 6.7" - 7" in the ceiling tile or sheet rock (Figure 1)

Notice: See reference below:

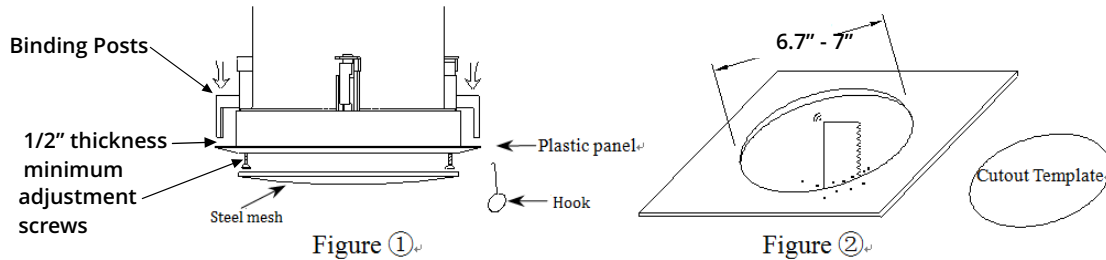

Installation of speaker equipment

1 The adjustment screws are located under the steel mesh cover. Use the small hook provided or similar hook to pull steel mesh cover out to expose the adjustment screws. The screws are tightened to compress the adjustable binding posts to the ceiling material.

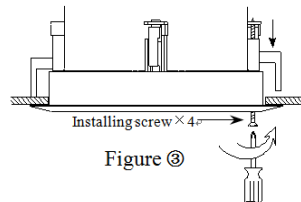

3. When installation complete, press the steel mesh back into speaker, 3/4" then test it.

